

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 200 291
A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 86300873.6

(51) Int. Cl.4: H01L 23/56

(22) Date of filing: 10.02.86

(30) Priority: 26.04.85 US 727946

(43) Date of publication of application:
10.12.86 Bulletin 86/45(84) Designated Contracting States:
DE FR GB NL

(71) Applicant: **TEKTRONIX, INC.**
Tektronix Industrial Park D/S Y3-121 4900
S.W. Griffith Drive P.O. Box 500
Beaverton Oregon 97077(US)


(72) Inventor: **Jones, Keith E.**
7255 S.W. 167th Place
Aloha Oregon 97007(US)

(74) Representative: **Wombwell, Francis et al**
Potts, Kerr & Co. 15, Hamilton Square
Birkenhead Merseyside L41 6BR(GB)

(54) Surface mountable microwave IC package.

(57) A surface mountable microwave IC package uses printed transmission lines on a printed circuit board in lieu of plumbing between milled packages. A backside co-planar waveguide is connected to a topside microstrip line by a through-hole in a carrier substrate. To compensate for inductance added by the hole and transmission line ends, a gap is adjusted to provide compensation capacitance. Hermeticity is assured by brazing a lead frame over the through-hole and using a solder sealed lid. The lid provides both hermeticity and shielding.

FIG. 1

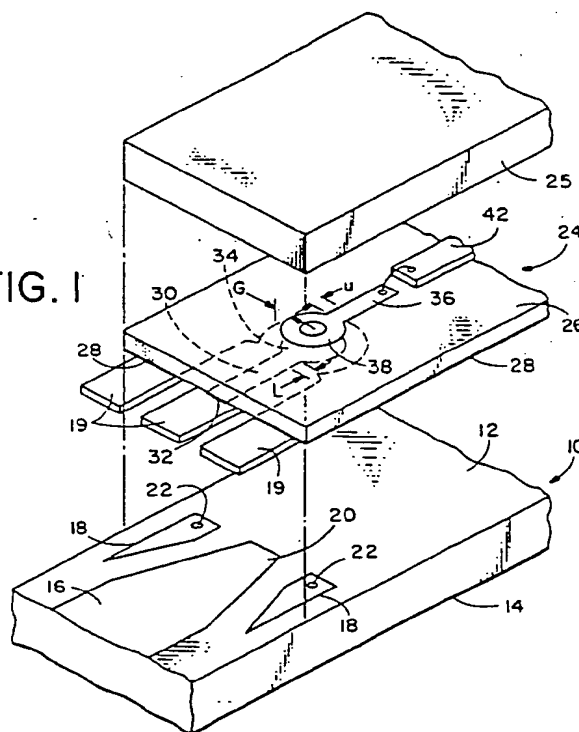

EP 0 200 291 A2

SURFACE MOUNTABLE MICROWAVE IC PACKAGE

Background of the Invention

Field of the Invention

The present invention relates to integrated circuit (IC) packages, and more particularly to a surface mountable microwave IC package which provides high performance at a reasonable cost.

Description of the Prior Art

The application of microwave gallium-arsenide (GaAs) integrated circuits is limited by package performance and/or complexity. Typical packages using milled metal enclosures with ceramic substrates are expensive and rarely hermetic. Hermetic enclosures, such as Kyocera or NTK multilayer ceramic carriers, are limited to one to two gigahertz with reasonable performance. High performance carriers, such as the Hypcon described in U.S. Patent No. 4,255,003 issued March 10, 1981 entitled "Electrical Connector" by William E. Berg, are expensive and complex.

What is desired is a low cost, hermetic or semi-hermetic, high performance, surface mountable GaAs microwave IC carrier.

Summary of the Invention

Accordingly, the present invention provides a surface mountable microwave IC package which uses printed transmission lines on a printed circuit board in lieu of plumbing between milled packages. A back side co-planar waveguide line is connected to a topside microstrip line by a through-hole in a carrier substrate. To compensate for inductance added by the hole and transmission line ends, a gap is adjusted to provide compensation capacitance. Hermeticity is assured by brazing a lead frame over the through-hole and using a solder sealed lid. The lid provides both hermeticity and shielding.

The objects, advantages and novel features of the present invention will be apparent from the following detailed description when read in conjunction with the appended claims and attached drawing.

Brief Description of the Drawing

FIG. 1 is an exploded perspective view of an IC surface mountable microwave package

according to the present invention.

FIG. 2 is a schematic view of an equivalent circuit for the package of Fig. 1.

FIG. 3 is a plan view for the hybrid circuit of the surface mountable microwave package.

FIG. 4 is a plan view of a lead frame for the hybrid circuit of FIG. 3.

FIG. 5 is an exploded perspective view of an alternative embodiment of an IC surface mountable microwave package according to the present invention.

FIG. 6 is a schematic view of an equivalent circuit for the package of Fig. 3.

FIG. 7 is a graphic view of a time domain reflectometer output for the package of Fig. 1.

Description of the Preferred Embodiment

Referring now to Figs. 1, 3 and 4 a printed circuit board 10 is shown having a substrate 12 and a ground plane 14 on the bottom of the substrate. A microstrip transmission line 16 is located on the top surface of the substrate 12. Ground pads 18 are located on the top surface of the substrate 12 near the end 20 of the transmission line 16, each pad having a metallized through-hole 22 to connect the pad with the ground plane 14 on the opposite side of the substrate. A controlled impedance taper of the transmission line end 20 brings the transmission line width down to a geometry commensurate with the surface mount package pinout 19.

A surface mountable package 24 has a carrier substrate 26, typically of a ceramic material well-known in the art, with a metallization layer, or ground plane, 28 on the bottom. A portion of the ground plane 28 is removed to form a co-planar transmission line 30. The co-planar transmission line 30 has a lead end 32 and a termination end 34. The co-planar transmission line 30 may be composed of an etched lead frame brazed to the substrate metallization. A microstrip transmission line 36 has a termination end 38 and is located on the top surface of the substrate 26. A metallized through-hole 40 connects the termination ends 34, 38 of the respective transmission lines 30, 36. An IC 42 is electrically connected to the microstrip transmission line 36. The pinout 19 is formed by a

lead frame 21 which extends beyond the edge of the surface mount package 24. A lid 25 may be solder sealed to the package 24 for both hermeticity and shielding.

The equivalent circuit for the circuit on the surface mountable package 24 is represented in Fig. 2. The co-planar transmission line 30 is represented as a coaxial cable, as is the microstrip line 36. The inductance X_L represents the portion L of the coplanar transmission line 30 which crosses the gap G between the ground plane 28 and the through-hole 40 metallization, connecting with the termination end 34. Likewise, the inductance X_U represents the portion U of the microstrip transmission line 36 which also crosses the gap G, connecting with the termination end 38. The capacitance X_G represents the gap G, and can be altered by adjusting the width of the gap to compensate for inductances introduced by the transmission lines 30, 36 and the through-hole 40. For standard 50 ohm transmission lines the co-planar line 30 is 10 mils wide with a three mil gap on each side. The substrate 26 is typically 10 mils thick of alumina (AlO_3) or the like. For a hole 40 of 10 mils diameter a 15 mil annulus forms the gap G, determined empirically. For thick substrates 26 of 25 mils or greater the microstrip transmission line 26 may be replaced with a co-planar transmission line to keep the line width small.

Another embodiment is shown in Fig. 5. A co-planar transmission line section 44 is in the form of a pad, and a microstrip transmission line 46 is in the form of a "T". Referring to the equivalent circuit of Fig. 6 X_G represents the capacitance of the gap G, X_H represents the inductance of the through-hole 40, X_U represents the portion U of the transmission line 46 across the gap G, and X_T represents the capacitance introduced by the width step T. The capacitive reactances X_G and X_T provide shunt capacitance to compensate for the inductance of the through-hole 40.

For both embodiments the surface mountable package 24 is placed on the printed circuit board 10 so that the ground plane 28 contacts the ground pads 18 and the co-planar transmission lines 32, 44 contact the end 20 of the micro-strip transmission line 16 on the printed circuit board. The package 24 is then connected to the board 10 using conventional techniques such as reflow soldering. Preferably the co-planar transmission line 32, 44 and hole 40 are bonded to a lead frame 21 of a material such as Kovar which provides hermeticity and ease of inspection of the reflow solder connections. The etched leads 19 give a measure of

compliance which compensates for the difference in temperature coefficients of expansion between the ceramic substrate 24 and the material of the PCB substrate 12, typically Teflon or glass fiber.

The values for the various inductances and compensating capacitances caused by the gap G are solved empirically simultaneously as described below such that $50 = X_L + X_U = X_G$ or $50 = X_H + X_U = X_G$ for the two embodiments, respectively. As shown in Fig. 7 for the first embodiment the portion of the graph which is positive represents inductance and the portion which is negative represents capacitance. For compensation the negative area should equal the positive area.

Thus, the present invention provides a hermetic, surface mountable microwave IC package which is operable at frequencies up to 20 gigahertz and is relatively inexpensive.

Claims

1. A surface mountable microwave package comprising:

a printed circuit board having a first microwave transmission line thereon with ground pads adjacent the end of said microwave transmission line;

a carrier substrate;

a co-planar transmission line on the bottom of said carrier substrate situated so as to connect with said first microwave transmission line on said printed circuit board when said carrier substrate is placed on said printed circuit board; and

a second microwave transmission line on the top of said carrier substrate connected to said co-planar transmission line via a metallized through-hole, an integrated circuit being connected to said second microwave transmission line.

2. A package as recited in claim 1 wherein said second microwave transmission line comprises a microstrip transmission line.

3. A package as recited in claim 1 wherein said second microwave transmission line comprises a co-planar transmission line.

4. A package as recited in claim 1 wherein said co-planar transmission line further comprises capacitive means for compensating for inductive reactances introduced by said co-planar and said second microwave transmission lines.

5. A package as recited in claim 4 wherein said capacitive means comprises a gap surrounding the end of said co-planar transmission line and said through-hole, the width of said gap being adjusted to provide a required compensation.

6. A package as recited in claim 5 wherein said capacitive means further comprises a width step integral with and near the end of said second microwave transmission line.

7. A surface mountable microwave IC package for mounting on a printed circuit board having a first microwave transmission line comprising:

a carrier substrate;

a co-planar waveguide transmission line on the bottom of said carrier substrate for connection to said first microwave transmission line; and

a second microwave transmission line on the top of said carrier substrate, electrically connected to said co-planar waveguide transmission line, to which an integrated circuit is electrically connected.

8. A package as recited in claim 7 further comprising:

5 a lead frame brazed to said co-planar waveguide transmission line for sealing the electrical connection via said metallized through-hole and for connecting with said first microwave transmission line; and

10 a solder sealed hermetic lid enclosing said carrier substrate.

9. A package as recited in claim 1 further comprising:

15 a lead frame brazed to said co-planar waveguide transmission line for sealing the electrical connection via said metallized through-hole and for connecting with said first microwave transmission line; and
20

a solder sealed hermetic lid enclosing said carrier substrate.

25

30

35

40

45

50

55

4

FIG. 1

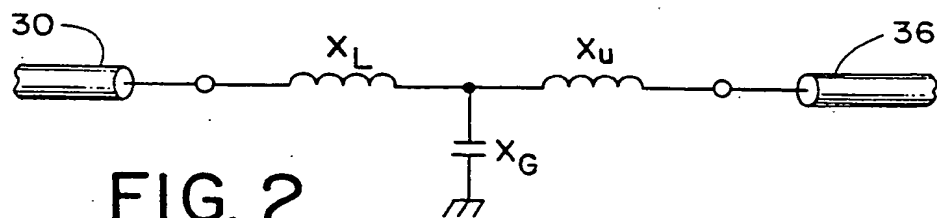
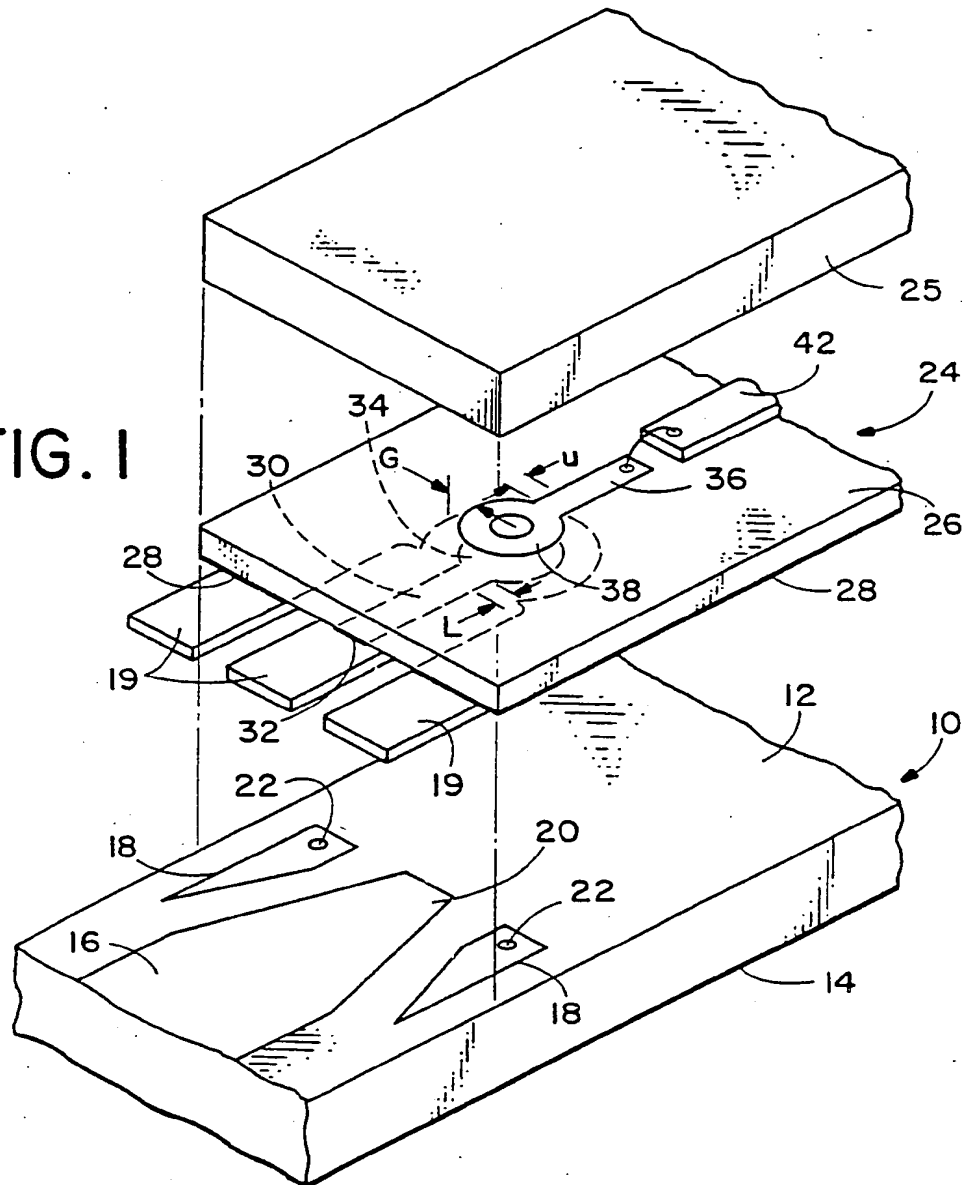


FIG. 2

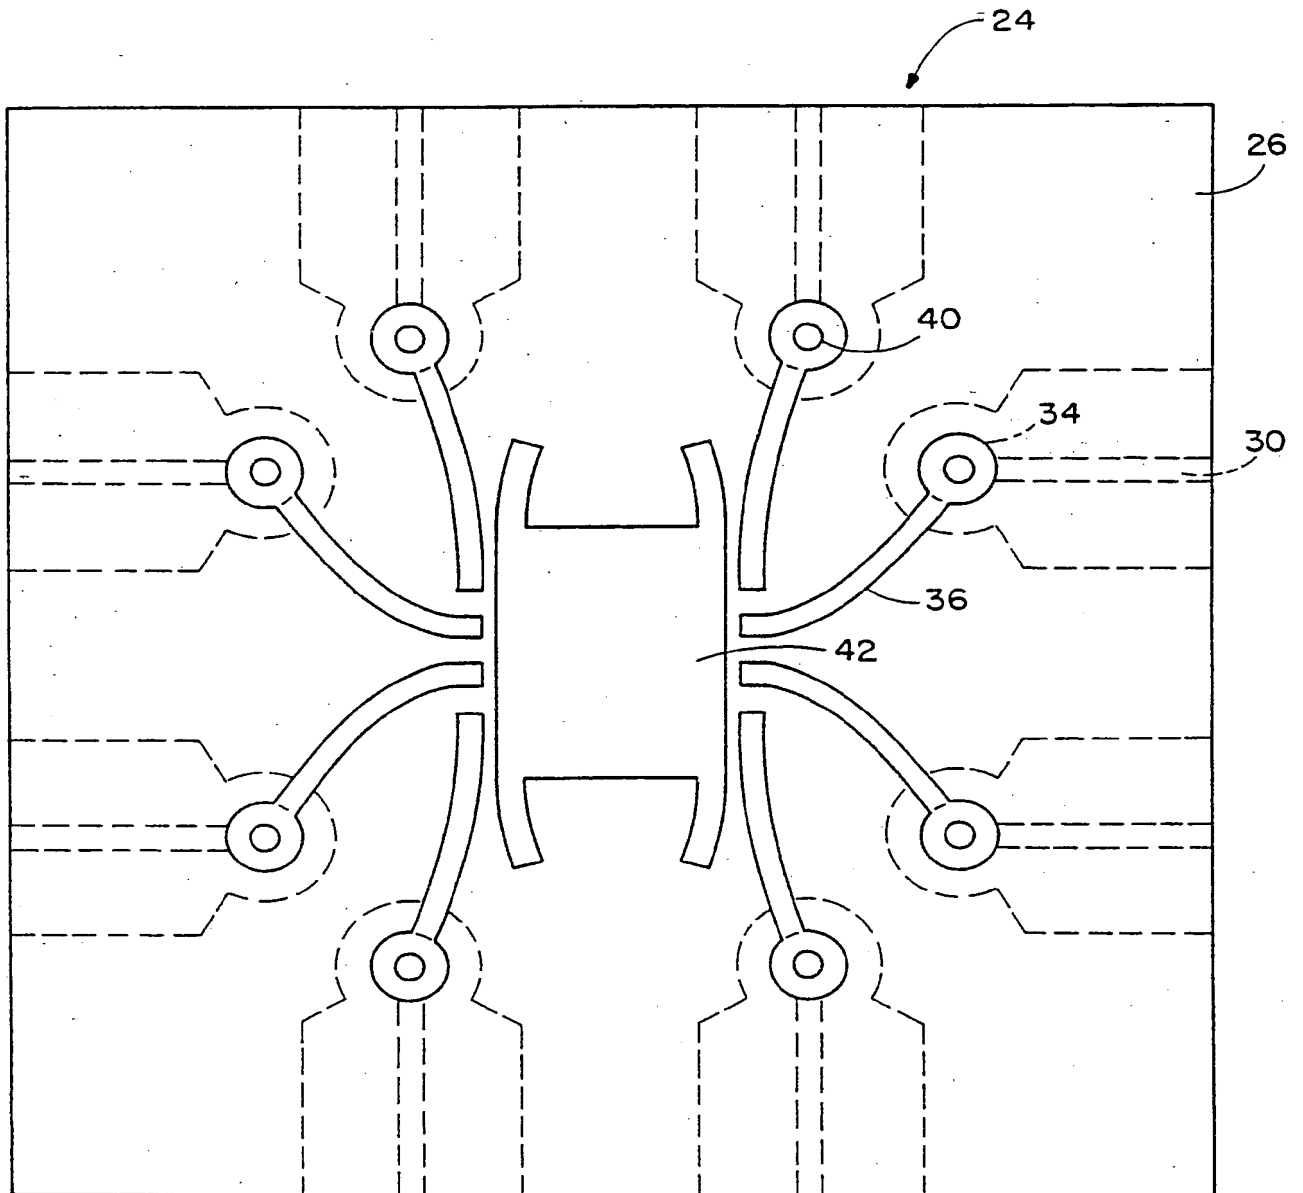


FIG. 3




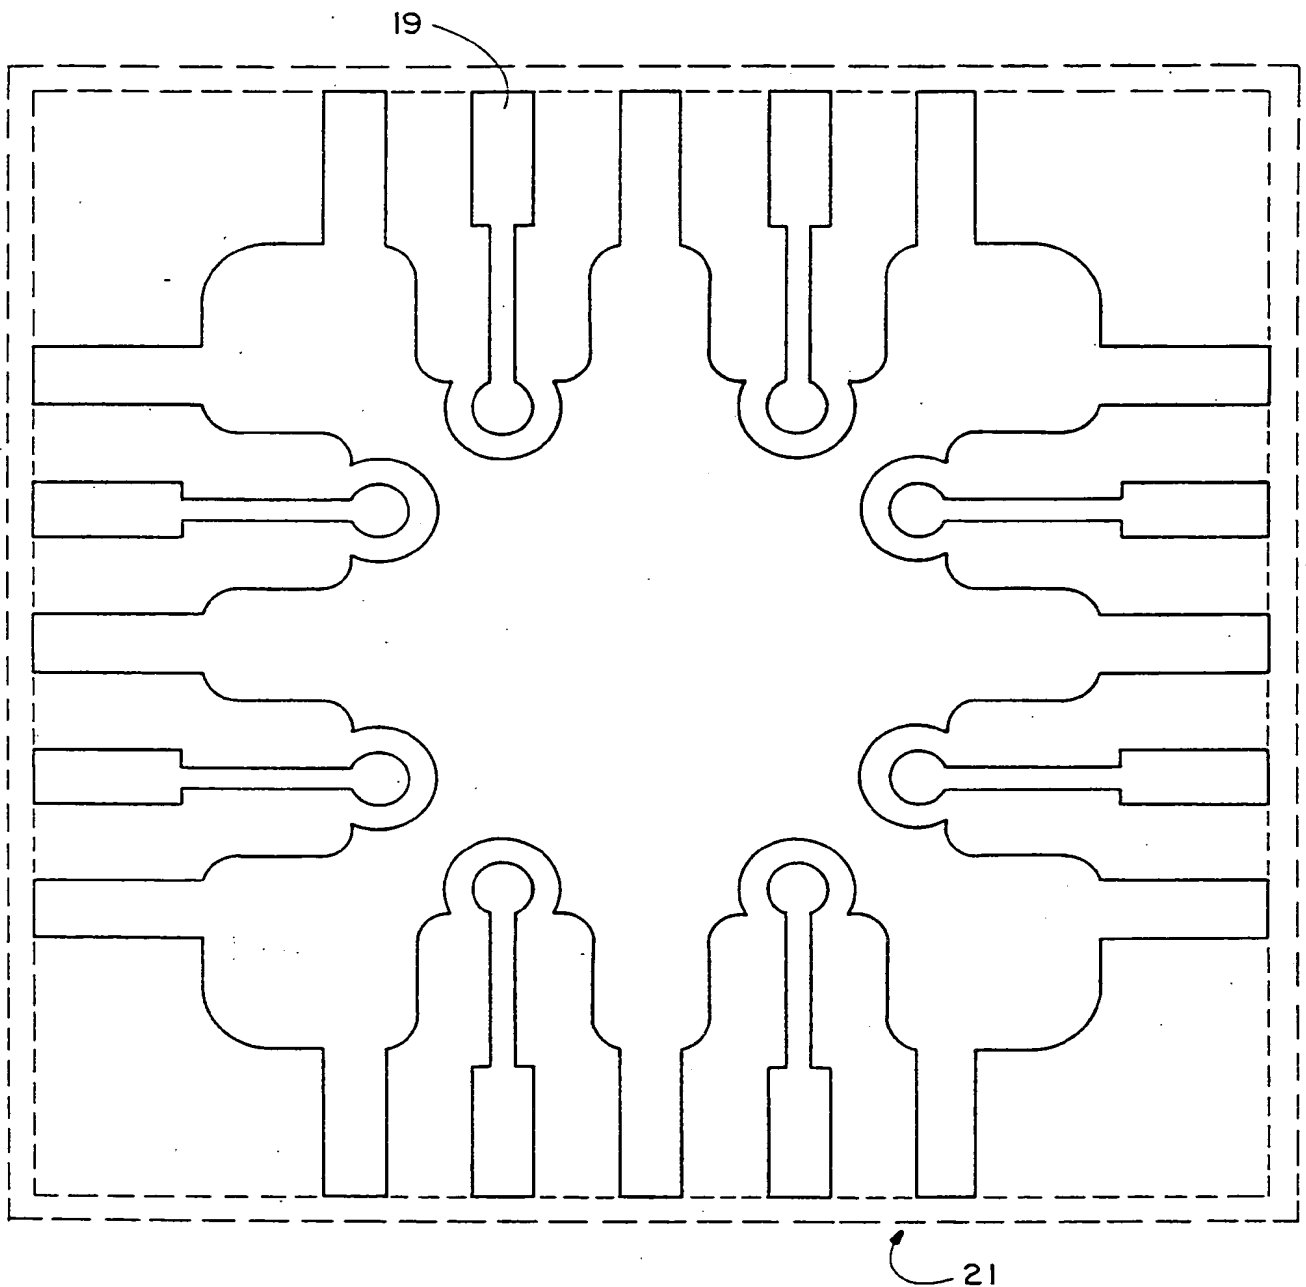


FIG. 4

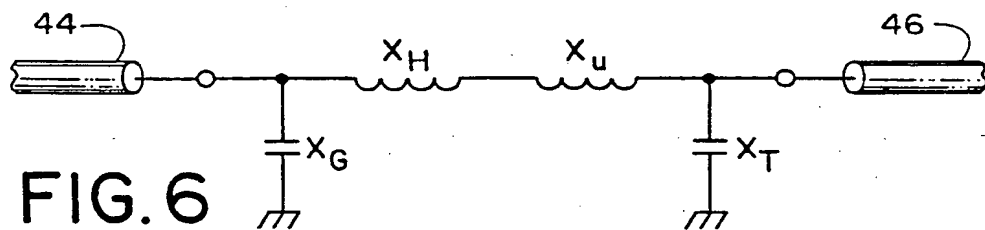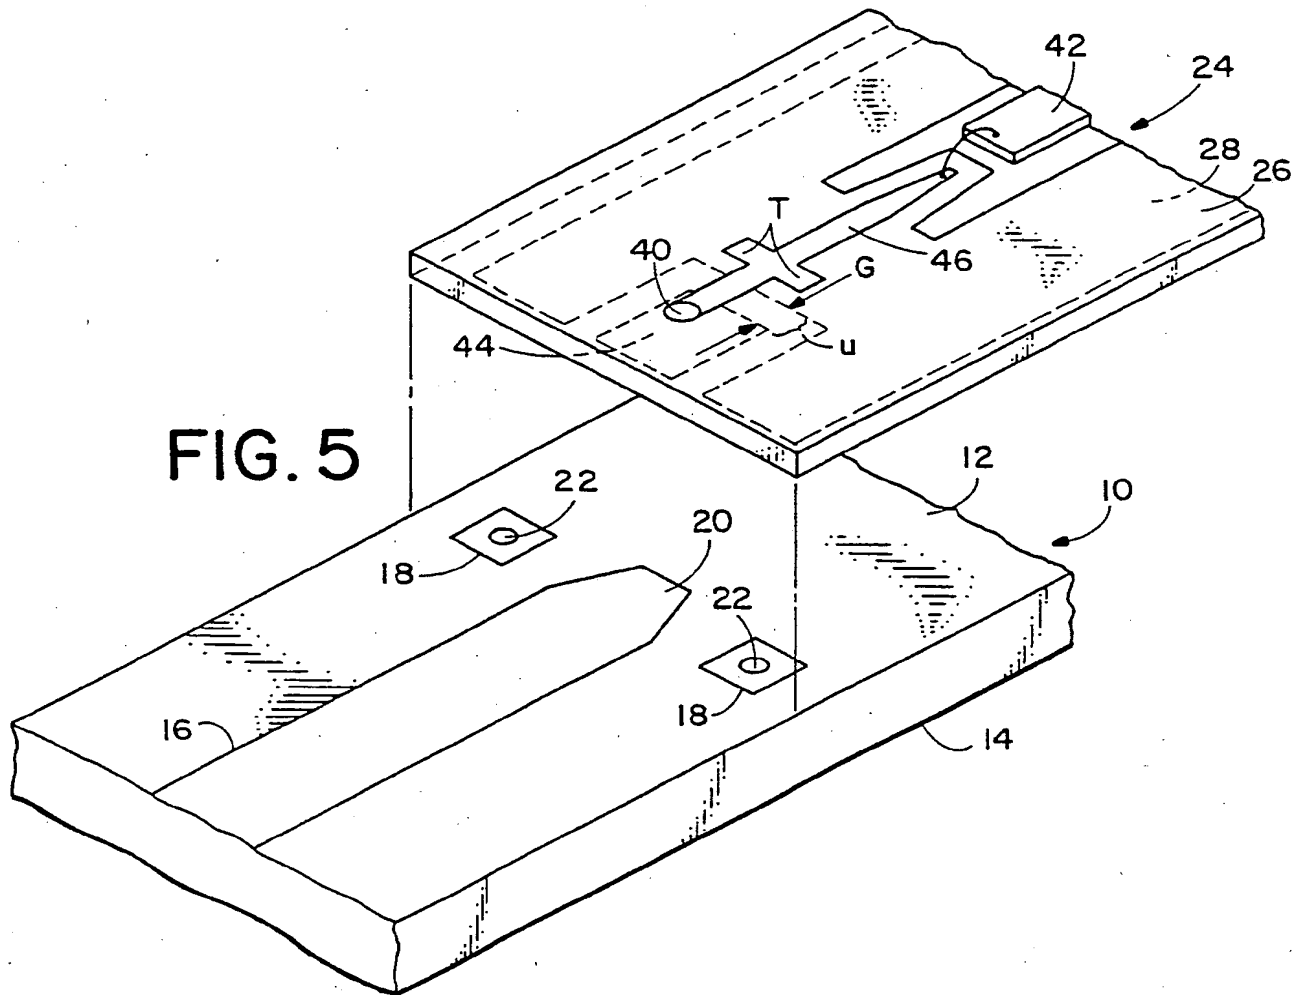

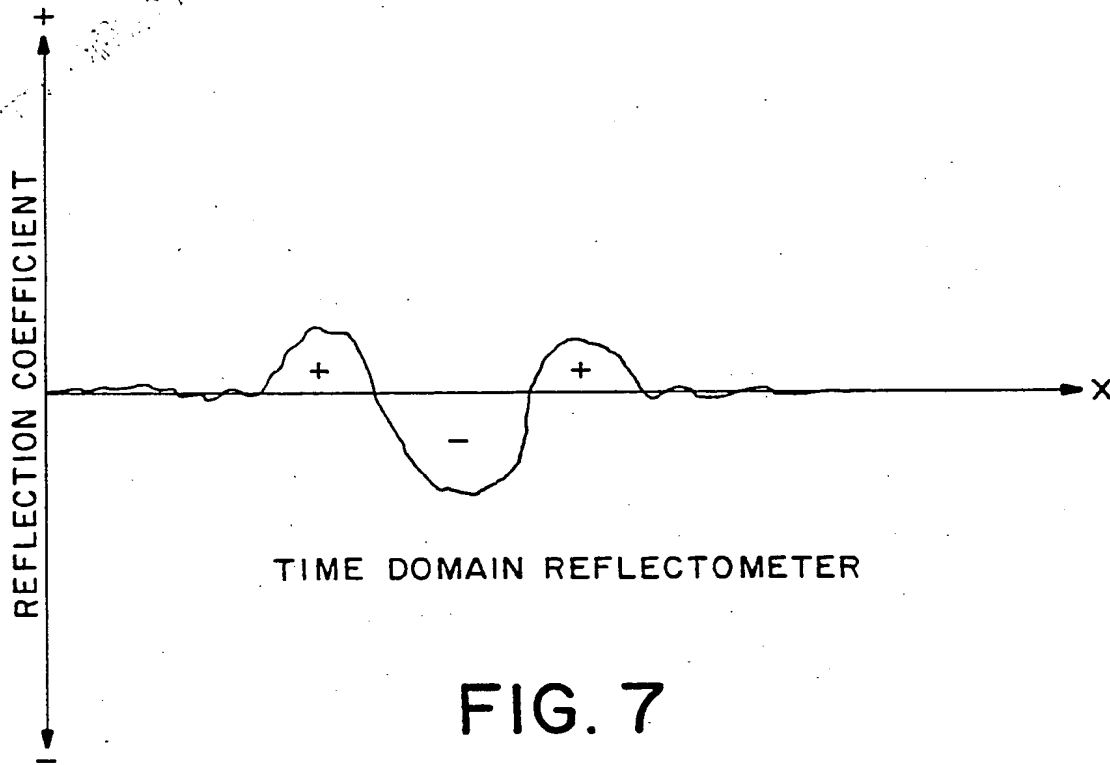

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

12

EUROPEAN PATENT APPLICATION

21 Application number: **86300873.6**

51 Int. Cl.⁴: **H 01 L 23/56**

22 Date of filing: **10.02.86**

30 Priority: **26.04.85 US 727946**

43 Date of publication of application:
10.12.86 Bulletin 86/45

84 Designated Contracting States: **DE FR GB NL**

88 Date of deferred publication of search report:
27.05.87 Bulletin 87/22


71 Applicant: **TEKTRONIX, INC.**
Tektronix Industrial Park D/S Y3-121 4900 S.W. Griffith
Drive P.O. Box 500
Beaverton Oregon 97077 (US)

72 Inventor: **Jones, Keith E.**
7255 S.W. 167th Place
Aloha Oregon 97007 (US)

74 Representative: **Wombwell, Francis et al**
Potts, Kerr & Co. 15, Hamilton Square
Birkenhead Merseyside L41 6BR (GB)

54 Surface mountable microwave IC package.

57 A surface mountable microwave IC package (24) uses printed transmission lines (16) on a printed circuit board (10) in lieu of plumbing between milled packages. A backside co-planar waveguide is connected to a topside microstrip line (36) by a through-hole in a carrier substrate (26). To compensate for inductance added by the hole and transmission line ends, a gap is adjusted to provide compensation capacitance. Hermeticity is assured by brazing a lead frame over the through-hole and using a solder sealed lid (25). The lid provides both hermeticity and shielding.

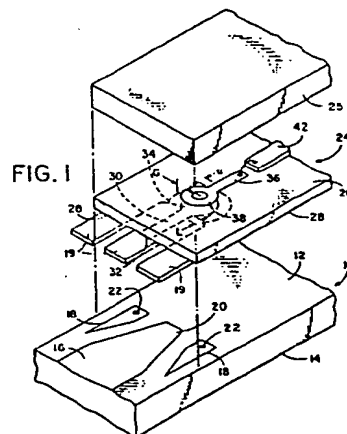



European Patent
Office

EUROPEAN SEARCH REPORT

Application number

EP 86 30 0873

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
A	US-A-4 276 558 (FORD AEROSPACE & COMMUNICATIONS) * Figures; column 2, line 58 - column 3, line 35 *	1,3,7	H 01 L 23/56
A	--- EP-A-0 018 174 (FUJITSU) * Figures 3A,3B; page 6, line 10 - page 7, line 1 *	1,7	
A	--- US-A-3 303 439 (WESTERN) * Figure 4; column 3, lines 22-50 *	1,2,7	
A	--- PATENTS ABSTRACTS OF JAPAN, vol. 8, no. 250 (E-279)[1687], 16th November 1984; & JP-A-59 126 654 (TOSHIBA K.K.) 21-07-1984 * Abstract *	1,7	
A	--- FR-A-2 507 409 (RTC)		TECHNICAL FIELDS SEARCHED (Int. Cl. 4) H 01 L H 01 P H 05 K
A	--- GB-A- 856 889 (MARCONI)		
A	--- DE-A-2 020 925 (MICROWAVE)		
--- -/-			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10-02-1987	Examiner CAMPLING N.C.G.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO Form 1503 03 82



EP 86 30 0873

DOCUMENTS CONSIDERED TO BE RELEVANT			Page 2
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
P, X	US-A-4 543 544 (MOTOROLA) * Figure 1; column 2, lines 28-61 * -----	1, 3, 4, 7	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10-02-1987	Examiner CAMPLING N.C.G.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO Form 1503 03 82

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)